

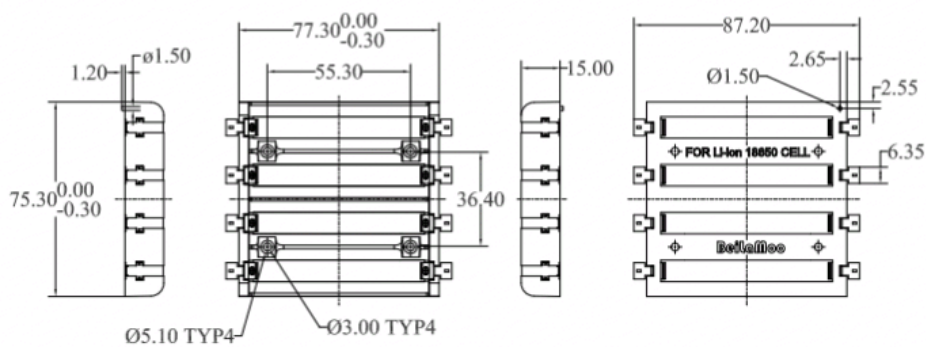


rated current:
about 8A

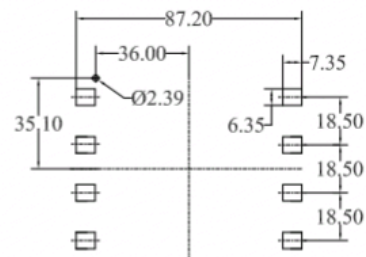

PCB LAYOUT



NOTE:

- * Type: Surface Mounted Device
- * Base Material: Nylon Resin, Black Color
- * Flammability Rating: UL94V-0
- * Contacts: 0.30 Phosphor Bronze Flash Gold
- * Dielectric Strength: 560 Volts/Mil. at 25℃ for 5 Sec.
- * RoHS COMPLIANT

乐清飞奔电子开关厂
www.fldz.com.cn

PART NAME			
FOUR LI-ION 18650 CELLS HOLDER			
	TOLERANCES	[MM]	DRN BY
	DECIMAL	[±.10]	HYQ
	ANGULAR	±0.50°	APPD
	UNLESS OTHERWISE SPECIFIED		XGY
			SCALE
		DWG NO.	DATE
		A18650X4-P8-SMT	2020 07 17
			IX
			CODE
			18650