
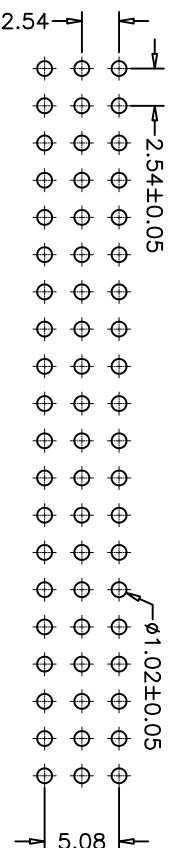
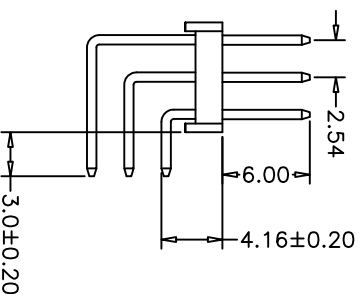
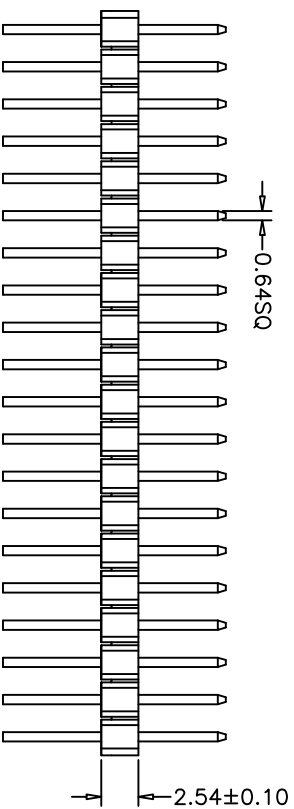


RoHS Compliant

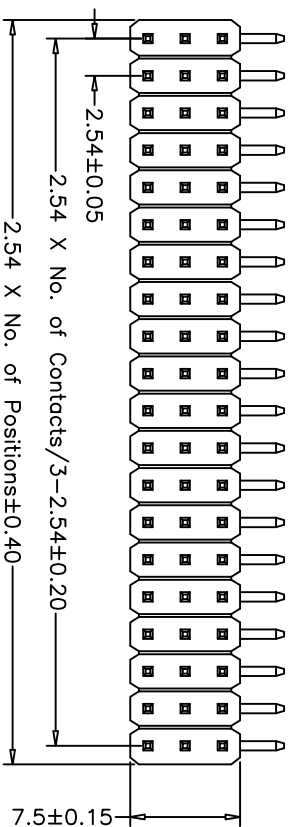

Recommended PCB Board Hole Layout

REV.	ECN NO.	DESCRIPTION	REVISER	DATE

Technical Data

Material:

Contact Material: Brass
Contact plating: Au or Sn Over 50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PBT+30%G.F

Electrical:

Current rating: 3Amps/contact max.
Contact resistance: $\leq 20m\Omega$ /contact
Insulation resistance: $\geq 1000M\Omega$ at V=100V
Voltage Rating: 550V AC/minute

Mechanical:

Mechanical life cycle: min.200
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C


Ordering Information


2R254-1T-XX-M1-G1-P1.306041

No. of Contacts _____ Packaging Option _____
06~120pins P1-Plastic Bag/Box
Material _____ P2-Tube
M1 PBT P3-Tube with cap
M2 NYLON66/66 P4-Tray
M3 NYLON 6T/9T P5-Tape&Reel
M4 LCP with lift cap/film

Plating Option _____

G1 G/F
G2 Au2μ"
G3 Au3μ"
G5 Au5μ"
G0 Au10μ"
G7 Au15μ"
TO-Tin 150μ"
GT-Duplex Plating

THIRD ANGLE PROJECTION		DRAWN BY:		FB. YANG	
		CHECKED BY:		GH. PANG	
ALL DIMENSIONS ARE IN MM		APPROVED BY:		TONY. OU	
TOLERANCE UNSPECIFIED		DATE:		05/15/2018	
X. ±0.35		SHEET:		SCALE: FIT	
XX ±0.20		1 OF 1		PART NUMBER:	
XXX ±0.15		REV:		2R254-1T-XX-M1-G1-P1.306041	
XXXX ±0.05		01		A4	
X° ±2°		X.X° ±1°			



深圳市多维鑫电子有限公司

SHENZHEN TORVENICS ELECTRONIC CO.,LTD.

Pin Header 2.54mm Right Angle Triple Row 0.64SQ

TORVEN 深圳市多维鑫电子有限公司
SHENZHEN TORVENICS ELECTRONIC CO.,LTD.

Pin Header 2.54mm Right Angle Triple Row 0.64SQ

8

7

6

5

4

3

2

1