

RoHS Compliant

REV.	ECN NO.	DESCRIPTION	REVISER	DATE

Technical Data

Material:




Contact Material: Brass
Contact plating: Au or Sn Over 50u" Ni
Insulator Material: Black Polyester UL94V-0
Standard: PBT+30%G.F

Electrical:

Current rating: 1.5Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 450V AC/minute


Mechanical:

Mechanical life cycle: min. 200
Operating temperatures:
Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C

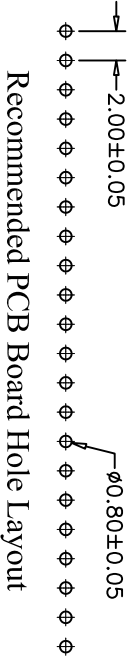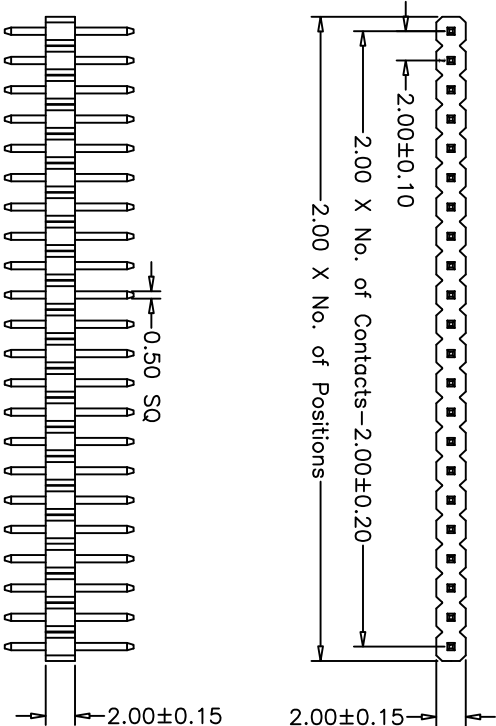

Ordering Information

2S200-20-1S-XX-M1-XX-P1.0880

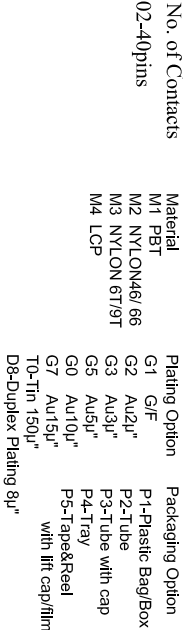

THIRD ANGLE PROJECTION		DRAWN BY:	FB.YANG
		CHECKED BY:	GH.PANG
ALL DIMENSIONS ARE IN MM		APPROVED BY:	TONY.OU
TOLERANCE UNSPECIFIED		DATE:	09/20/2016
X. ±0.35		SHEET:	2:1
X.XX ±0.15		1 OF 1	
X.XXX ±0.05		REV:	01
X.XX ±0.5°		SIZE:	A4
		PART NUMBER:	2S200-20-1S-XX-M1-XX-P1.0880

TORVEN 深圳市多维鑫电子有限公司
SHENZHEN TORVENIS ELECTRONIC CO.,LTD.

Pin Header 2.0mm ST Single Row H=2.0, L=8.8