



PCB LAYOUT(TOP VIEW)
TOLERANCE ± 0.05

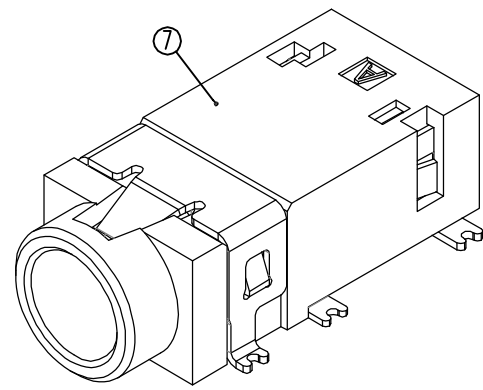

SCHEMATIC

MATTER	RoHs (PPM)
Cd	≤ 100
Pb	≤ 1000
Hg	≤ 1000
Cr6+	≤ 1000
PBB	≤ 1000
PBDE	≤ 1000

KEY SPECIFICATION:

1. RATING: DC 12V 1A
2. CONTACT RESISTANCE:50mΩ MAX
3. INSULATION RESISTANCE:100MΩ MIN
4. DIELECTRIC STRENGTH:500VAC FOR 1Min
5. OPERATING FORCE:3-30N
6. OPERATING LIFE:5,000CYCLES
7. OPERATING TEMPERATURE:-20℃~+85℃

8					TOLERANCE UNLESS SPECIFIED				
7	HOUSING	PA9T	1	BLACK					
6	6#CONTACT FOOT	PHOSPHOR BRONZE	1	Au PLATED	WITHIN 1.5: ±0.1mm				
5	5#CONTACT FOOT	PHOSPHOR BRONZE	1	Au PLATED	OVER 1.5: ±0.2mm				
4	4#CONTACT FOOT	PHOSPHOR BRONZE	1	Au PLATED	ANGLES: ±2°	ISSUE	DATE	DESCRIPTIONS	APPD.
3	3#CONTACT FOOT	PHOSPHOR BRONZE	1	Au PLATED		TITLE:3.5MM SMT PHONE JACK		UNIT:mm	DRWG. NO.:
2	2#CONTACT FOOT	PHOSPHOR BRONZE	1	Au PLATED		MODEL NO:PJ-3160A		SCALE:4:1	DWN
1	1#CONTACT FOOT	PHOSPHOR BRONZE	1	Au PLATED		XIAMEN JINBEILI ELECTRONICS CO.,LTD			CHK'D
NO.	DESCRIPTION	MATERIAL	QTY	PLATING					APPD.