



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PPA

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION






2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25° C~ +85° C

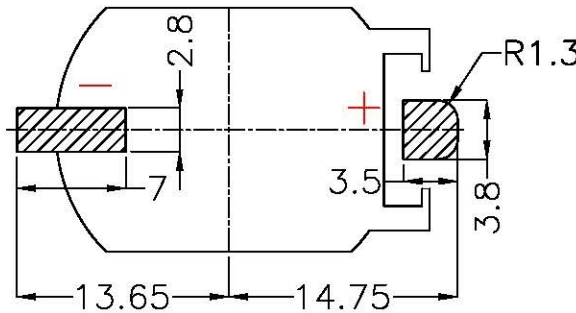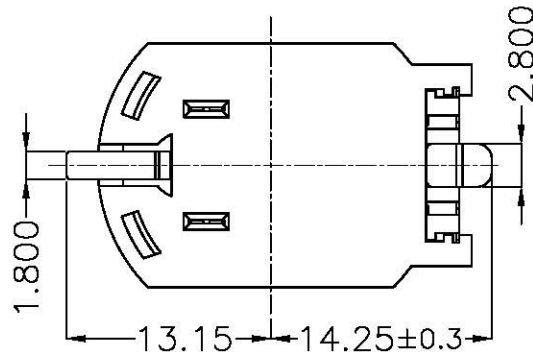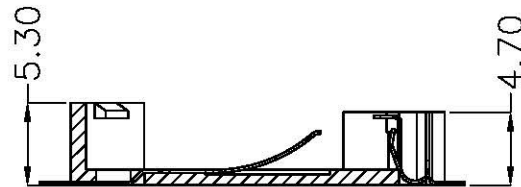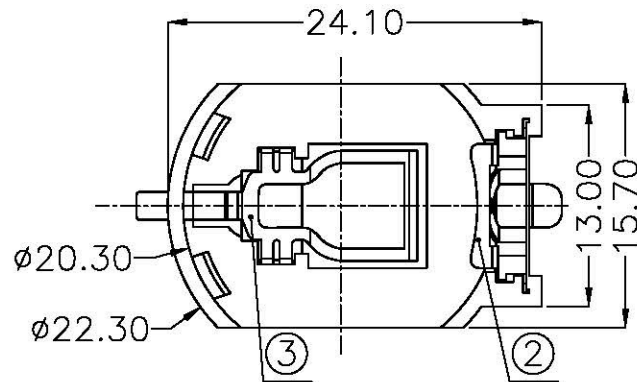

PCB Layout Diagram
Top View

ORDERING INFORMATION

F-08-B***005

電池盒系列

F-08系列

SMT 180° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2017-06-28

ZW DANG

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-06-28
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2017-06-28
X.X :±0.25	X.X :±0.5°	APVD	XueShunyang	DATE	2017-06-28
X.XX :±0.20		SCALE: 2:1	SIZE: A4	VIEW: ③ ④	
X.XXX :±0.10		UNIT: mm	REV.: A/0	OBJECT: MY	
WEIGHT: 0.86g					
SHEET 1 OF 1					
		TITLE:		F-2032-8C SMT	
		PART NO.:		F-08-B2AA005	
		DRAW NO.:		MY-CP-0063	