
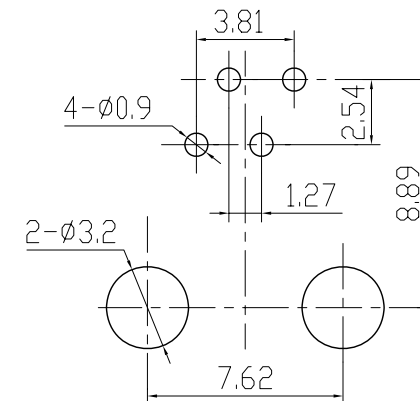
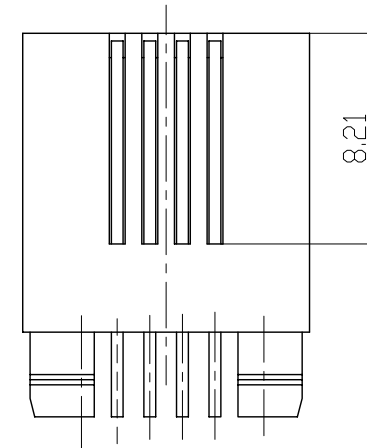
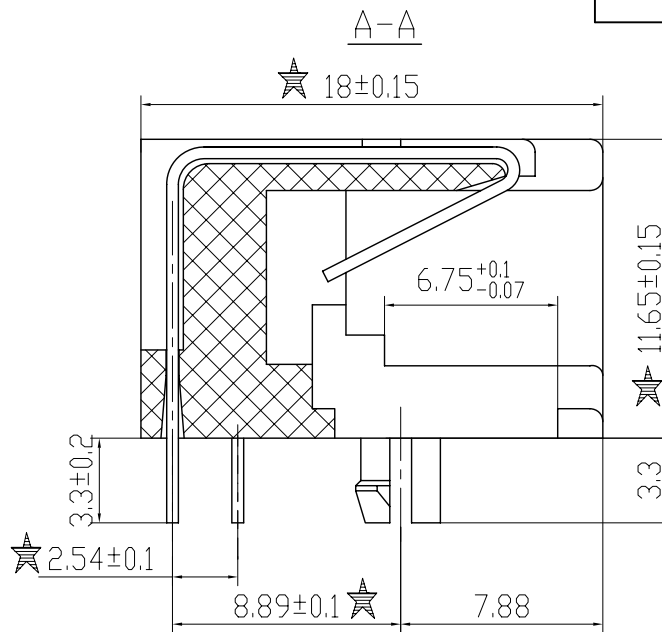


RoHS Compliant

3		2		1	
REV.	ECN NO.	DESCRIPTION		REVISER	DATE

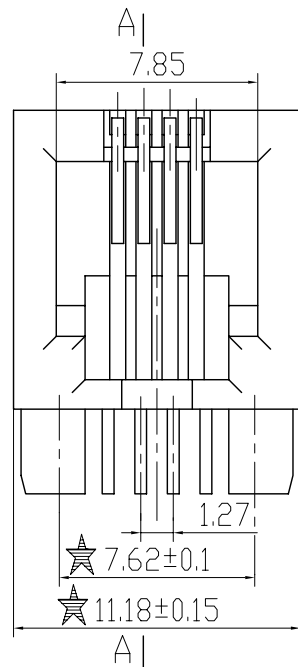

NOTES:

1. ELECTRICAL:

1.1 VOLTAGE RATING: 125 VAC RMS;

1.2 CURRENT RATING: 1.5 AMP;

1.3 CONTACT RESISTANCE: 20 MILLIOHMS Max;

1.4 INSULATION RESISTANCE: 1000 MEGOHMS

Min @500 VDC;

1.5 DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;

2. MECHANICAL:



2.1 HOUSING: PBT, UL94V-0, BLACK;

2.2 TERMINALS: DIA 0.46 PHOSPHOR BRONZE PLATED 3u" Au; .05U

2.3 DURABILITY: 750 CYCLES Min.

3. ★★ Critical Dimension.

5321插座 4P4C 普通PBT黑 G/F ROHS B531N-44GF-M001

THIRD ANGLE PROJECTION		DRAWN BY: 唐望森		 深圳市多维鑫电子有限公司 SHENZHEN TORVENICS ELECTRONIC CO.,LTD.
		CHECKED BY: 唐望森		
ALL DIMENSIONS ARE IN MM		APPROVED BY:		TITLE: 1X1 PORT MODULAR JACK W/O LED 4P4C NO SHIELD T/H
TOLERANCE UNSPECIFIED X. ±0.35 X.X ±0.20 X.XX ±0.15 X.XXX ±0.05 X.° ±2° X.X° ±1° X.XX° ±0.5°		DATE: 04/27/2014		
SHEET: 1 OF 1		SCALE: 1:1		PART NUMBER: THY531N-44GF-M001
REV.: A1		SIZE: A4		